
CONTENTS SUPPLIED

EACH FLAG KIT INCLUDES:

- (a) Carrying Case (1)
- (b) Poles (2, 3, or 4) Varies by flag size
- (c) Flag (1)
- (d) Bungee Cord (1)
- (e) Ground Spike (1)
- (f) Install Instructions (1)

BEFORE ASSEMBLY, PLEASE LAYOUT ALL PIECES AND CONFIRM ALL ARE INCLUDED AND ARE NOT DAMAGED

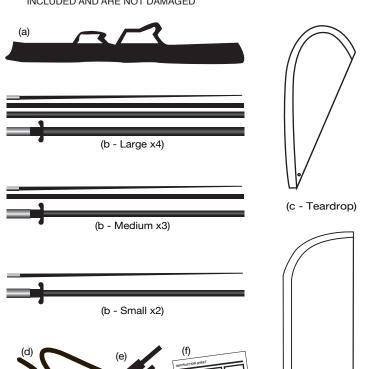

REQUIRED TOOLS

YOU WILL NEED A HAMMER TO INSTALL THE GROUND SPIKE.





(c - Blade)

ASSEMBLING PROCEDURE

STEP 1

- DO NOT INSTALL NEAR TREES, WIRES, POLES OR BUILDINGS
- ALLOW A MINIMUM OF 5ft. BETWEEN BANNER POLE AND NEAREST OBJECT





HAMMER ON THE TOP OF THE MAIN PART OF THE STEEL ROD TO INSTALL THE GROUND SPIKE.

*HAMMERING WRONG AREA ON GROUND SPIKE WILL DAMAGE THE GROUND SPIKE!!

ALWAYS USE GLOVES AND SAFETY GLASSES

STEP 3

CONNECT (4) POLES Large ARRANGE ALL POLES IN ORDER

FROM SMALLEST TO LARGEST BEFORE ASSEMBLY.





CONNECT (3) POLES - Medium


CONNECT (2) POLES - Small


STEP 6

SLIDE BANNER ON ASSEMBLED POLE STARTING ON SMALLEST END. MAKE SURE TO SLIDE THE POLE COMPLETELY INSIDE THE REINFORCED POCKET AT THE END OF THE POLE SLEEVE



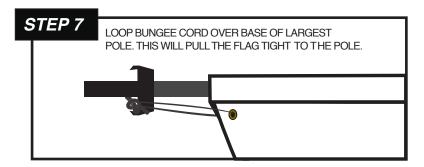





STEP 8

INSTALL POLE ONTO GROUND SPIKE



FINISHED!



INCLEMENT WEATHER TAKE YOUR FLAG DOWN

DURING INCLEMENT WEATHER OR HIGH WINDS

FLAGS CAN WITHSTAND A SUSTAINED WIND OF UP TO 25MPH.

DO NOT FLY YOUR BLADE FLAG IN EXTREME WINDS (24-31MPH OR 6BT AND HIGHER) AND/OR THUNDERSTORMS. DO NOT USE NEAR OVERHEAD WIRES.

EXERCISE CAUTION TO PREVENT INJURY



CLEANING

FLAGS CAN BE WASHED IN ALL HOUSEHOLD WASHING MACHINES AT 140 F WITH REGULAR DETERGENT.

RINSE THE FLAG THOUROUGHLY AFTER WASHING. HANG THE FLAG FLAT TO DRY OR INSTALL WET FLAG BACK ON THE POLE.