

# Rectangle Flag - Install Instructions

ESTIMATED ASSEMBLY/INSTALL TIME: 15 MINUTES


ONE PERSON REQUIRED TO ASSEMBLE/INSTALL

## CONTENTS SUPPLIED

### EACH FLAG KIT INCLUDES:

- (a) Carrying Case (1)
- (b) Poles (3, 4, or 5) Varies by flag size
- (c) Flag (1)
- (d) Bungee Cord (1)
- (e) Ground Spike (1)
- (f) Install Instructions (1)

BEFORE ASSEMBLY, PLEASE LAYOUT ALL PIECES AND CONFIRM ALL ARE INCLUDED AND ARE NOT DAMAGED

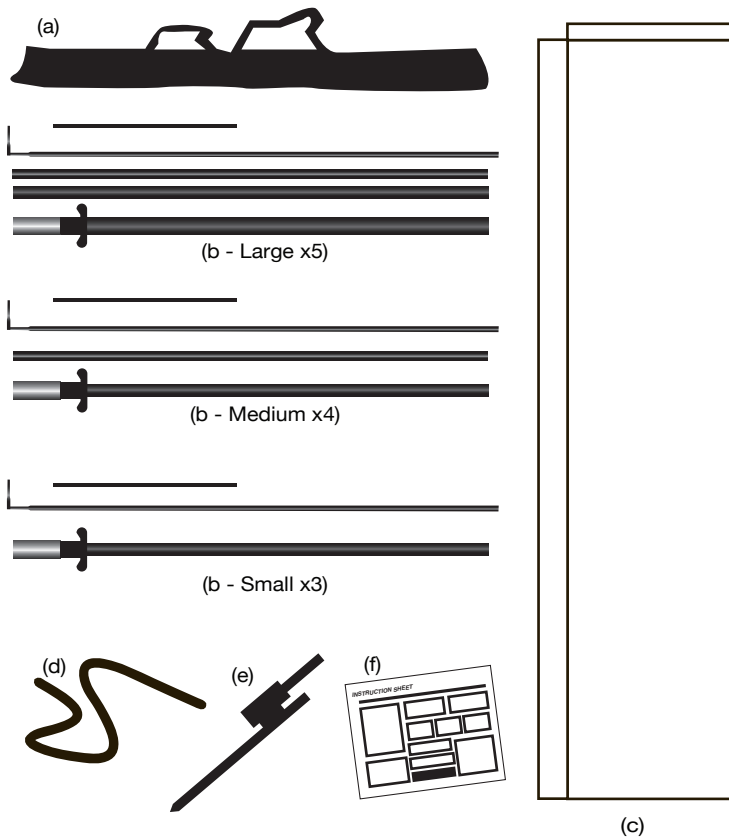

## REQUIRED TOOLS


YOU WILL NEED A HAMMER TO INSTALL THE GROUND SPIKE.



## ASSEMBLING PROCEDURE


### STEP 1

- DO NOT INSTALL NEAR TREES, WIRES, POLES OR BUILDINGS
- ALLOW A MINIMUM OF 5ft. BETWEEN BANNER POLE AND NEAREST OBJECT



### STEP 2

#### INSTALL GROUND SPIKE

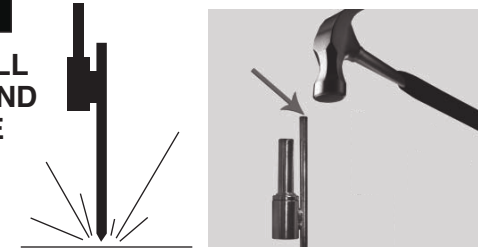

HAMMER ON THE TOP OF THE MAIN PART OF THE STEEL ROD TO INSTALL THE GROUND SPIKE.

**\*HAMMERING WRONG AREA ON GROUND SPIKE WILL DAMAGE THE GROUND SPIKE!!**

**ALWAYS USE GLOVES AND SAFETY GLASSES AND EXERCISE CAUTION WHEN USING TOOLS**

### STEP 3


#### CONNECT POLES

ARRANGE ALL POLES IN ORDER FROM SMALLEST TO LARGEST BEFORE ASSEMBLY. ASSEMBLE BY SLIDING THE ENDS OF EACH POLE INTO THE OTHER UNTIL **SNUG**. IF POLES ARE NOT FITTING TOGETHER CORRECTLY, TRY THE OPPOSITE END OR REARRANGE THE ORDER OF THE POLES.



\*SAVE SMALL CROSSBAR FOR STEP 6

### STEP 4

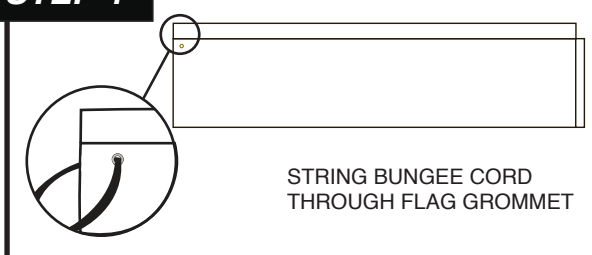

STRING BUNGEE CORD THROUGH FLAG GROMMET


### STEP 5

TIE BUNGEE ENDS




### STEP 6

INSERT THE ASSEMBLED POLE (a) THROUGH THE LONG POLE SLEEVE IN THE FLAG. INSERT THE SMALLEST TOP POLE PIECE (b) THROUGH THE SMALL POLE SLEEVE AT THE TOP OF THE FLAG, AND CONNECT IT TO THE LONG POLE. ALLOW ENOUGH SLACK IN THE POLE SLEEVE TO HELP SLIDE TO POLES TOGETHER. **ENSURE A TIGHT CONNECTION.**

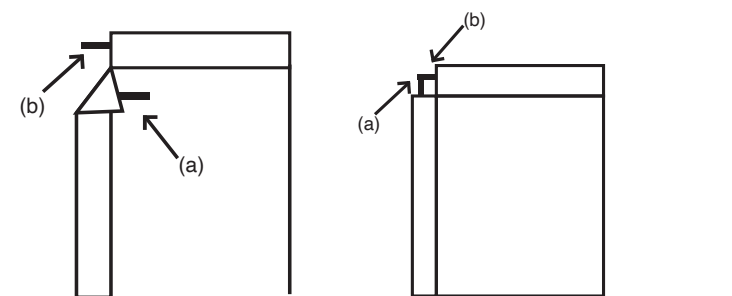

### STEP 8

INSTALL POLE ONTO GROUND SPIKE

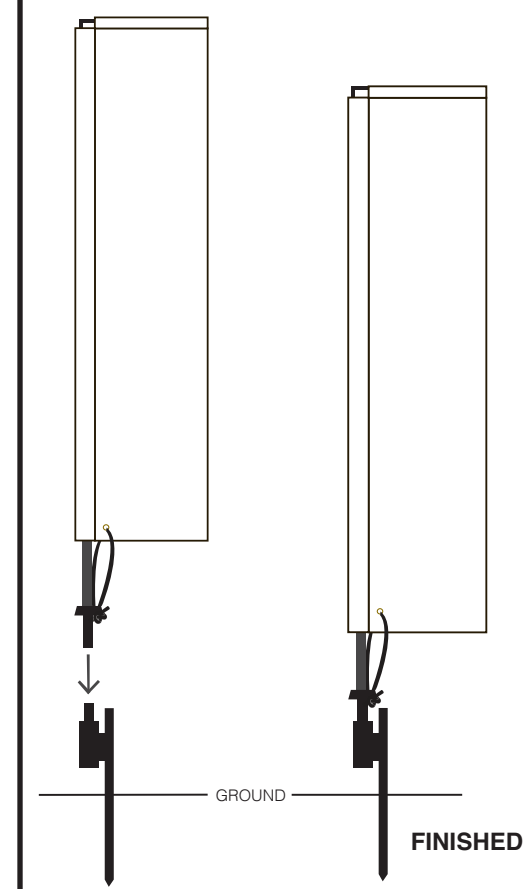

## INCLEMENT WEATHER

TAKE YOUR FLAG DOWN DURING INCLEMENT WEATHER OR HIGH WINDS

FLAGS CAN WITHSTAND A SUSTAINED WIND OF UP TO 25MPH.

DO NOT FLY YOUR BLADE FLAG IN EXTREME WINDS (24-31MPH OR 6BT AND HIGHER) AND/OR THUNDERSTORMS. DO NOT USE NEAR OVERHEAD WIRES.

EXERCISE CAUTION TO PREVENT INJURY

## CLEANING

FLAGS CAN BE WASHED IN ALL HOUSEHOLD WASHING MACHINES AT 140 F WITH REGULAR DETERGENT.

RINSE THE FLAG THOROUGHLY AFTER WASHING. HANG THE FLAG FLAT TO DRY OR INSTALL WET FLAG BACK ON THE POLE.

